


2D扫码引擎新选择  
2D Engine is A Good Choice

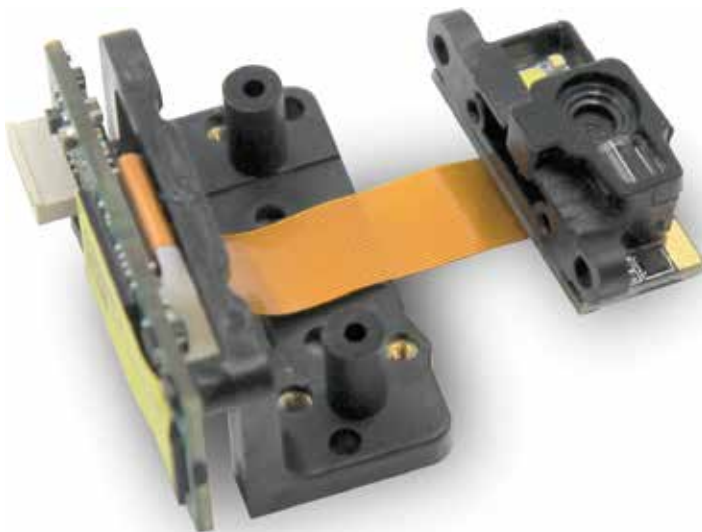

集成灵活简单  
Easy to Use and Integrate

- 轻松集成
- 内置 TTL RS232 和 USB 接口
- 尺寸小-适应各种场合
- 高速解码和高精度识读能力
- 低功耗，性能强大

- Accurate Aimer
- Miniature- easy to Integrate
- Build in RS232 and USB Interface
- High Speed, Omni Directional Scanning
- Read all Mainstream 1D/2D Barcodes

Physical Characteristics	
尺寸Engine w/o Decode board:	31.5mm x 11mm x 12mm
尺寸Engine Decode board:	38mm x 19mm x 8mm
重量Weight:	9g
电压Voltage:	5 VDC
电流Current:	400 mA
Performance Characteristics	
传感器像素Image(Pixels):	640 pixels(H) x 480 pixel(V)
光源Light Source:	Aiming: 617 nm LED; illumination: 6500K LED
视场角Field of View:	40°(H) x 35°(V)
旋转倾斜偏转Roll/Pitch/Yaw:	360°, ±65°, ±60°
打印对比度Print Contrast:	25% minimum reflective difference
运动容差Motion Tolerances:	up to 25 in. (63.5cm) per second
接口支持Interfaces Supported:	USB, RS232
Symbology Decode Capability	
一维条码/1-D	UPC, EAN, Code 128, Code 39, Code 93, Code 11, Matrix 2 of 5, Codabar Interleaved 2 of 5, Mis Plessey, GSI DataBar, China Postal, Korean Postal , etc
二维条码/2-D	PDF417, MicroPDF417, Data Matrix, Maxicode, QR Code, MicroQR, Aztec, Hanxin, etc.
User Environment	
工作温度Operating Temperature:	0°C to 50°C
存储温度Storage Temperature:	-40°C to 70°C
湿度Humidity:	0% to 95% relative humidity, non-condensing
环境光免疫Ambient Light Immunity:	100,000 Lux
Decode Ranges	
5 MIL	50mm - 110mm
13 MIL	40mm - 300mm
Code 39 (17.8 mil)	40mm - 250mm
1D Minimal Resolution	4 mil
Performance may be impacted by bar code quality and environmental conditions	
